



## RECYFIX®PLUS 100

RECYFIX®PLUS 100, class D 400, Type 01 with ductile iron grating heelsafe, SW 6 mm, black

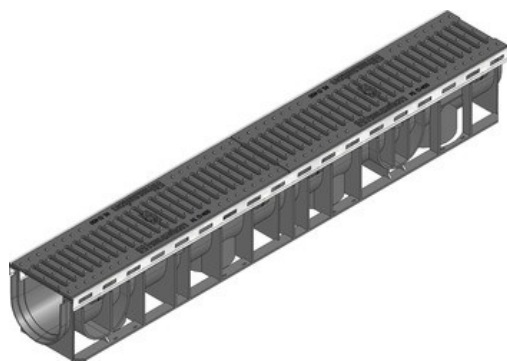

D 400

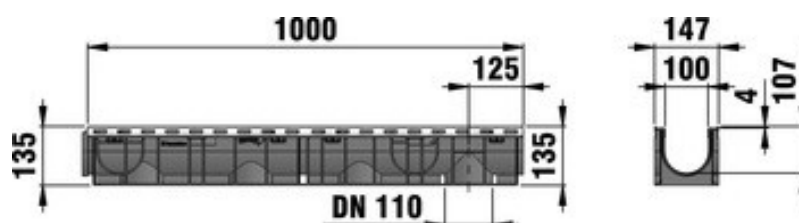

### ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Internal channel cross-sect. cm <sup>2</sup>	Inlaying depth	Item-no.
1000	147	135	9,362	290	92	6	40371

### ■ Product description:

RECYFIX PLUS 100 type 01 - channel made of modified PP, with integrated metal profile for the grating support, according to EN 1433, with vertical connection possibility DN/OD 110, with ductile iron grating made of spheroidal ductile iron GJS 500-7, slot width 80/6, with horizontal thrust resistance and locking device, black, locked, loading capacity from A 15 - D 400, not for use across the carriageway of highways and motorways in moving traffic, L/W/H 1000x147x135 mm, item no. 40371

### ■ Material:

- **Channel body:** modified Polypropylene
- **Bolts:** Steel black galvanised
- **Locking handle:** RECYFIX Material (recycled PA)
- **Angle housing:** strip galvanized steel
- **Grating:** Ductile iron GJS 500-7

### ■ Type acc. DIN EN 1433:

M

### ■ Set of rules:

DIN 19580/EN 1433

### ■ Application areas:

- Facade drainage
- Flat roofs, terraces and balconies
- Pedestrian zones



- Gardening and landscaping
- Market squares, markets
- Public areas and squares
- Car parking facilities
- Cityscapes with architectural value
- Cycle paths and footpaths
- School yards
- Access drives private

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!